

MAG100

MAGNETOSTRICTIVE

Measuring length absolute up to 3 m linear position transducer



DATASHEET - Rev.3 - 18012018



CHARACTERISTICS

- Measuring range from 100 to 3000mm
- High Resistance to shock and vibration
- Working pressures up to 350bars
- Customizable cursor
- Absolute output



ADVANTAGES


- Absolute Contactless linear position measurement
- High Resolution, High Linearity
- Without null zone
- Unlimited mechanical life
- Rod, nipple and flange AISI 316
- Easy in-field installation and replacement
- Position, speed and acceleration measured values




High protection level




Shock/vibration resistant



Redundancy output



Reverse polarity protection



Wide range temperature



Functional safety



CANopen output



Directive 2011/65/EU



EU conformity

MAG100

MAGNETOSTRICTIVE

Measuring length absolute up to 3 m linear position transducer



PRODUCT DESCRIPTION

MAG100 is a magnetostrictive position transducer designed for use with hydraulic cylinders in mobile application. Its unique design, plus a wide range of cursor configurations, ensures easy installation and total compatibility with cylinder manufacturer specifications.

Working temperature from -40 to +85°C, working pressures up to 350 bars, high resistance to vibration and shock give the sensor the indispensable strength needed for heavy-duty use. High performance in terms of transduction of measurement defined as linearity, hysteresis and repeatability. The signal is CAN open redundant output.



PRODUCT CODE

MAG100. a . b . c . d . e ORDER CODE

a	Power supply
2	◀ = 9 ... 30 VDC

c	Sensor Output
6	◀ = CANopen redundant
28	◀ = CANopen SIL2-Pld

e	Cursor
X	◀ = none
0	◀ = Custom cursor
1	◀ = Standard cursor

b	Measuring length
XXXX	◀ = mm (steps of 0100 mm)

d	Type of connection
1	◀ = Male connector M12x5, PUR cable 30cm

DATASHEET - Rev.3 - 18012018

MAG100

MAGNETOSTRICTIVE

Measuring length absolute up to 3 m linear position transducer


TECHNICAL SPECIFICATION

Measuring range	0,1 ... 3 m
Magnetostrictive resolution	0.1 mm
Magnetostrictive Linearity	±0.04 % (F.S)
Magnetostrictive Repeatability	±0.005 % (F.S)
Operating Pressure	350 bars (peak max ... 500 bars)
Type of connection	Male connector M12, 5-pin PUR cable 300 mm
Protection	IP67
Temperature range head	-40°C ... +85°C [-40°F ... +185°F]
Temperature Operating Rod	-40°C ... 125°C [-40°F ... +257°F]
Temperature Coefficient	±0.004 % (F.S)/°C
Material	stainless steel AISI316
Rod Diameter	10 mm
Nipples Thread	M18 x 1,5mm
Shock resistance	acc. to EN 60068-2-27 30 G, 11 ms
Vibration resistance	acc. to EN 60068-2-6 10 ... 500 Hz

ELECTRICAL CHARACTERISTICS

Power supply	9 ... 30 V DC
Interface	CANopen
Profile conformity	CIA DS301 (CIA DS406 for SIL2-Pld)
Electromagnetic compatibility	acc. to EN 61326-1, EN 61326-3-1
CE compliant	acc. to EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

ELECTRICAL CONNECTION M12 X 5 PINS



Pinout

1	CAN-GND
2	+Vin
3	GND
4	CAN-H
5	CAN-L

OPERATING PRINCIPLE

The magnetostrictive effect on metallic wire or rod creates a change in length or volume of the wire or rod in the presence of a magnetic field. Ferromagnetic metals can have negative or positive magnetostrictive properties, for example they can shrink or stretch which in turn decreases or increases its volume. This effect is used in our magnetostrictive linear position sensors.



MAG100



MAGNETOSTRICTIVE

Measuring length absolute up to 3 m linear position transducer



TYPE OF MAGNET

1] Cursor STD

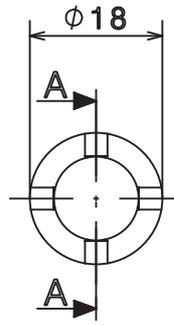

Section A-A


MAG100

MAGNETOSTRICTIVE


Measuring length absolute up to 3 m linear position transducer




DIMENSIONS [mm]

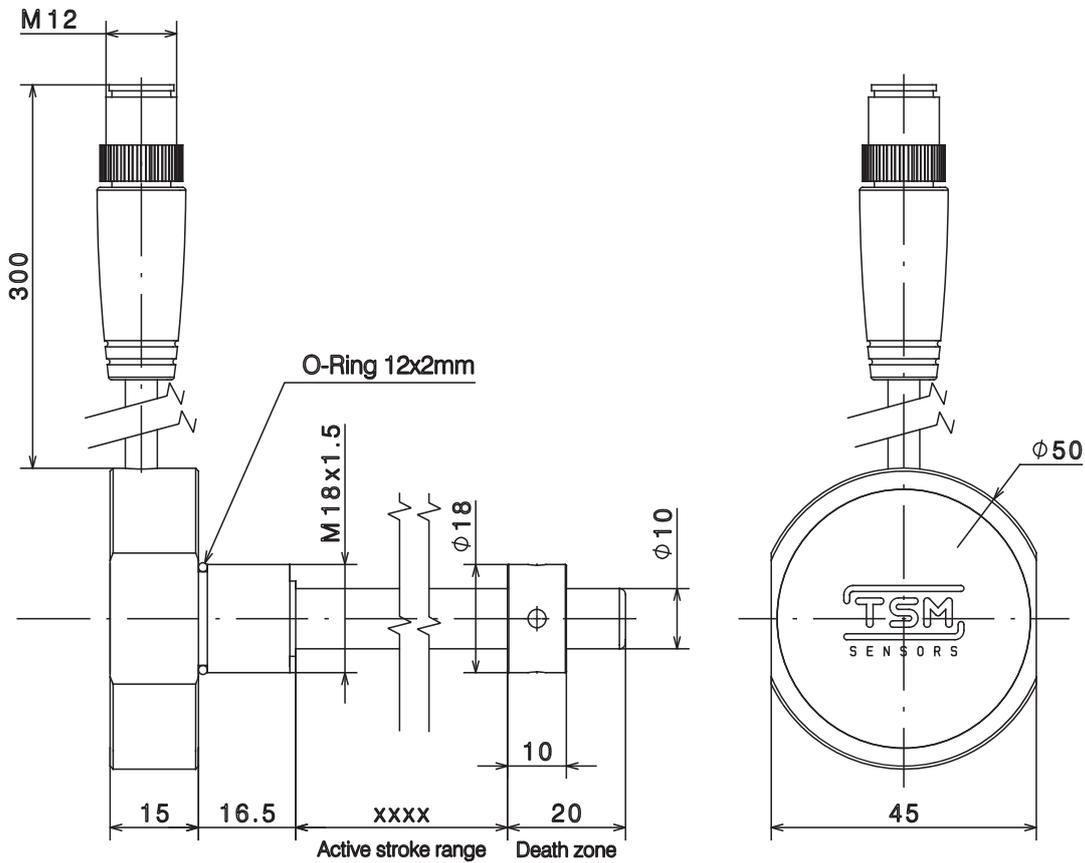

Head seat

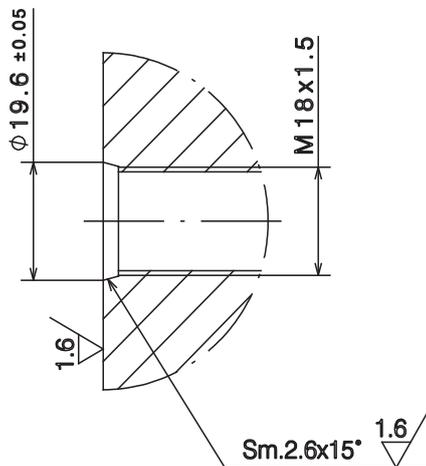

Magnet seat

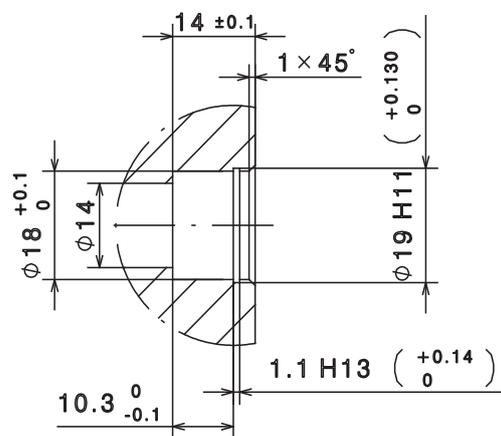

WARNING: For installation use a maximum tightening torque of 60 Nm